LFV200

The intelligent limit switch for all kinds of liquids



CE



#### Technical data overview

Measurement principle	Vibrating level switch
Detection principle	Contact
Medium	Fluids
Measurement	Switch
Process temperature	-40 °C +150 °C (depending on type)
Process pressure	-1 bar 64 bar
Output signal	Non-contact switch Transistor output PNP Transistor output PNP with IO-Link (depending on type)
Accuracy of sensor element	± 2 mm

#### Product description

The vibrating level switch of the LFV200 product family detects the pre-defined levels in liquid systems with maximum precision. Whether indicating that a container has reached its maximum fill level (overfill protection) or that it is empty or used in pipes to prevent the pumps from running dry, the LFV200 works with all liquids and is wear- and maintenance-free. A high surface quality and the rugged tuning fork made of stainless steel make the LFV200, in combination with aseptic process connections, the first choice for applications even with the strictest hygiene requirements. With the LFV230, extended pipe variants up to 1,200 mm are available. With IO-Link, the oscillation frequency, amplitude and temperature of the sensor can be read out in addition to the switching signal, which enables extended diagnostics and predictive maintenance.

#### At a glance

- · Commissioning without container filling or medium calibration
- Immune to deposit formation
- Process temperature up to 150 °C
- Two electrical output versions and IO-Link available
- Pipe extension up to 1,200 mm
- Hygienic designs with polished surface, CIP- and SIP-capable
- Housing made of 316L stainless steel
- Very high repeatability

### Your benefits

- Universal and reliable technology for nearly all liquids and applications
- Can be used in containers and pipes regardless of the mounting situation
- · Easy installation and commissioning, no medium calibration necessary
- · Easy operation and system integration
- Maintenance-free system
- · Sensors can be tested while installed
- Frequency, amplitude and temperature of the sensor can be read out via IO-Link
- · Extended pipe variants for more flexibility


#### **Fields of application**

- Point level measurement in storage tanks
- Point level measurement in release agent tanks
- · Monitoring of pouring machine supply lines
- Point level measurement in CIP reservoirs
- · Monitoring of hydraulic and coolant systems

### Type code

Other models and accessories -> www.sick.com/LFV200

#### LFV200 type code

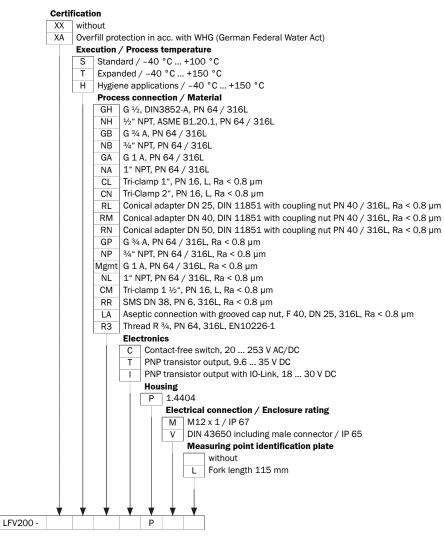


Not all variants of the type code can be combined!

#### LFV230 type code

## Certification

our	ocraneation				
XX	without				
XA	XA Overfill protection in acc. with WHG (German Federal Water Act)				
	Execution / Process temperature				
	S	Stand	ndard / -40 °C +100 °C		
	Т	Expanded / -40 °C +150 °C			
	Н	H Hygiene applications / -40 °C +150 °C			
	Process connection / Material				
		GB	G ¾ A, PN 64 / 316L		
		NB	<sup>3</sup> / <sub>4</sub> " NPT, PN 64 / 316L		
		GA	G 1 A, PN 64 / 316L		
		NA	1" NPT, PN 64 / 316L		
		CL	Tri-clamp 1", PN 16, L, Ra < 0.8 μm		
		CN	Tri-clamp 2", PN 16, L, Ra < 0.8 μm		
		RL	Conical adapter DN 25, DIN 11851 with coupling nut PN 40 / 316L, Ra < 0.8 $\mu m$		
		RM	Conical adapter DN 40, DIN 11851 with coupling nut PN 40 / 316L, Ra < 0.8 $\mu m$		
		RN	Conical adapter DN 50, DIN 11851 with coupling nut PN 40 / 316L, Ra < 0.8 $\mu$ m		
		R3	Thread R 34, PN 64, 316L, EN10226-1		
	Electronics				
			C Contact-free switch, 20 253 V AC/DC		

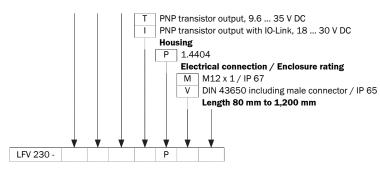

Not all variants of the type code can be combined!

# SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com



Online data sheet

