



ICD880-3212100

ICD8xx

IMAGE-BASED CODE READERS

SICK
Sensor Intelligence.



Ordering information

Type	Part no.
ICD880-3212100	1061170

Other models and accessories → www.sick.com/ICD8xx



Detailed technical data

Features

Optical focus	Dynamic focus control
Sensor	Dual-line CMOS sensor
Sensor resolution	8,192 px (200 dpi, with 2.5 m/s conveyor speed)
Lens	
Focal length	80 mm
Reading distance	800 mm ... 1,350 mm ¹⁾
Field of view	800 mm (200 dpi)
Depth of field	550 mm (200 dpi)

¹⁾ At 0,2 mm code resolution.

Mechanics/electronics

Connection type	7 x M12 2 x RJ45
Power consumption	Typ. 75 W
Battery	Type: TL-2450 cell (1/10C cell), soldered, non-rechargeable Chemical system: Lithium thionyl chloride (Li-SOCI ₂) Lithium quantity: 0.2 g
Housing material	Aluminum die cast Aluminum extruded profile
Housing color	Light blue (RAL 5012)
Enclosure rating	IP64 (DIN 40 050)
Protection class	III (IEC 1010-1)
Weight	13.5 kg
Dimensions (L x W x H)	496 mm x 208 mm x 214 mm
MTBF	80,000 h
MTTR	< 10 min

Performance

Readable code structures	1D codes, 2D codes, Stacked, plain text
Bar code types	Interleaved 2 of 5, Codabar, Code 128, Code 39, EAN/UPC with add-on, GS1-128 / EAN 128, postal codes
2D code types	Data Matrix ECC200, MaxiCode, PDF417, others on request

Print ratio	2:1 ... 3:1
Transport speed	4.8 m/s (100 lpi)
Minimum object distance	≥ 50 mm

Interfaces

Serial	✓, RS-232
Function	Service interface
Data transmission rate	≤ 56,700 Baud
Ethernet	✓ (3), TCP/IP
Function	Service interface, FTP, real-time image output
Data transmission rate	1x 10/100 Mbit/s, 2x Gbit/s
CAN bus	✓ (2)
Function	SICK CAN sensor network
Data transmission rate	10 kbit/s ... 1 Mbit/s
PROFIBUS DP	✓
Remark	Via MSC800 controller
Optical indicators	5 LED (status displays)
Memory card	SD card, 128 MB

Ambient data

Vibration resistance	IEC 68-2-6
Shock resistance	IEC 68-2-27 IEC 68-2-32
Ambient operating temperature	0 °C ... +50 °C
Storage temperature	-20 °C ... +70 °C
Permissible relative humidity	95 %, Non-condensing
Ambient light immunity	2,000 lx, on code
Bar code print contrast (PCS)	≤ 40 %

Classifications


ECLASS 5.0	27280103
ECLASS 5.1.4	27280103
ECLASS 6.0	27280103
ECLASS 6.2	27280103
ECLASS 7.0	27280103
ECLASS 8.0	27280103
ECLASS 8.1	27280103
ECLASS 9.0	27280103
ECLASS 10.0	27280103
ECLASS 11.0	27280103
ECLASS 12.0	27280103
ETIM 5.0	EC002550
ETIM 6.0	EC002550
ETIM 7.0	EC002999

ETIM 8.0	EC002999
UNSPSC 16.0901	43211701

Reading field diagram

Camera type ICD880 with illumination type ICI890 (900 mm)

Reading field height in mm (inch)

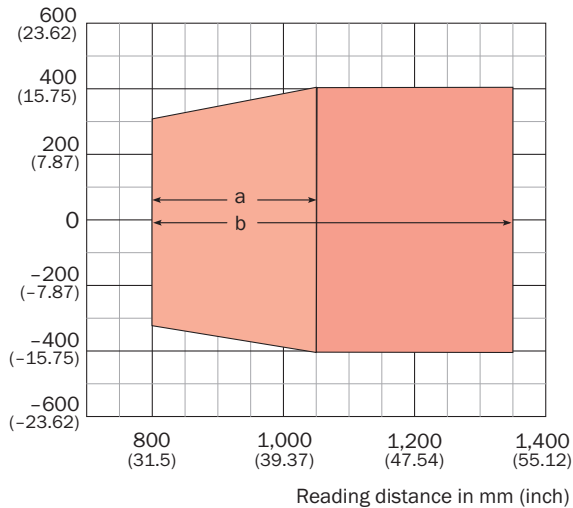

Resolution

- a: 0.15 mm (5.9 mil), 250 dpi
- b: 0.20 mm (7.9 mil), 200 dpi

Recommended services

Additional services → www.sick.com/ICD8xx

	Type	Part no.
Extended warranty <ul style="list-style-type: none"> Product area: Machine vision, LiDAR sensors, safety camera sensors, Safety laser scanners, Safety radar sensors, Radar sensors, Fixed mount barcode scanners, Image-based code readers, RFID, Mobile handheld scanners Range of services: The services correspond to the scope of the statutory manufacturer warranty (SICK general terms of delivery). Duration: Five-year warranty from delivery date. 	Extended warranty for a total of five years from delivery date	1680671

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com