

# CFP1000-XPBNNBX

CFP Cubic

**LEVEL SENSORS** 





# Ordering information

| Туре            | Part no. |
|-----------------|----------|
| CFP1000-XPBNNBX | 1083253  |

Other models and accessories → www.sick.com/CFP\_Cubic

Illustration may differ



#### Detailed technical data

#### **Features**

| Medium              | Fluids             |
|---------------------|--------------------|
| Measurement         | Switch, Continuous |
| Probe length        | 1,000 mm           |
| Process pressure    | -0.5 bar 3 bar     |
| Process temperature | -20 °C +80 °C      |
| UL approval         | <b>√</b>           |
| RoHS certificate    | <b>√</b>           |
| IO-Link             | <b>√</b>           |

#### Performance

| Accuracy of sensor element       | ± 15 mm, with water or oil under reference conditions |
|----------------------------------|---|
| Reproducibility                  | < 5 mm  |
| Resolution                       | < 2 mm  |
| Response time                    | < 300 ms  |
| Dielectricity constant           | ≥ 2   |
| Conductivity                     | No limitation   |
| Deactivated area at end of probe | 7 mm 15 mm, Depending on probe length                 |
| MTTF                             | 171 years   |
| Display                          | <b>√</b>  |

## Electronics

| Communication interface | IO-Link |
|-------------------------|---------|

 $<sup>^{1)}</sup>$  All connections are polarity protected. All outputs are overload and short-circuit protected.

| Supply voltage       10 ∨ DC 30 ∨ DC ¹)         Power consumption       ≤ 100 mA at 24 ∨ DC without output load         Initialization time       ≤ 4 s         Protection class       III         Connection type       Round connector M12 x 1, 5-pin         Output signal       2 x PNP/NPN/push-pull transistor outputs switchable and 1 x analog output 4 mA 20 mA / 0 v 10 V automatically switchable depending on output load or output voltage depending on the load         Output load       4 mA 20 mA < 500 0hm at Uv > 15 V, 4 mA 20 mA < 350 0hm at Uv > 12 V, 0 V 10 V > 750 0hm at Uv 14 ≥ V         Hysteresis       Min. 3 mm, min. 2 °C, free adjustable         Output current       < 100 mA         Inductive load       < 1 H         Capacitive load       100 nF         Enclosure rating       IP67         Temperature drift       < 0.1 mm/K         Lower signal level       3.8 mA 4 mA         Upper signal level       20 mA 20.5 mA         Resolution of analog output       12 bit |                             |   |
|--|-----------------------------|---|
| Initialization time       ≤ 4 s         Protection class       III         Connection type       Round connector M12 x 1, 5-pin         Output signal       2 x PNP/NPN/push-pull transistor outputs switchable and 1 x analog output 4 mA 20 mA / 0 V 10 V automatically switchable depending on output load or output voltage depending on the load         Output load       4 mA 20 mA < 500 Ohm at Uv > 15 V, 4 mA 20 mA < 350 Ohm at Uv > 12 V, 0 V 10 V > 750 Ohm at Uv 14 ≥ V         Hysteresis       Min. 3 mm, min. 2 °C, free adjustable         Output current       < 100 mA         Inductive load       < 1 H         Capacitive load       100 nF         Enclosure rating       IP67         Temperature drift       < 0.1 mm/K         Lower signal level       3.8 mA 4 mA         Upper signal level       20 mA 20.5 mA  | Supply voltage              | 10 V DC 30 V DC <sup>1)</sup>   |
| Protection class  Connection type  Round connector M12 x 1, 5-pin  0utput signal  2 x PNP/NPN/push-pull transistor outputs switchable and 1 x analog output 4 mA 20 mA / 0 V 10 V automatically switchable depending on output load or output voltage depending on the load  0utput load  4 mA 20 mA < 500 Ohm at Uv > 15 V, 4 mA 20 mA < 350 Ohm at Uv > 12 V, 0 V 10 V > 750 Ohm at Uv 14 ≥ V  Hysteresis  Min. 3 mm, min. 2 °C, free adjustable  0utput current    capacitive load  | Power consumption           | ≤ 100 mA at 24 V DC without output load   |
| Connection typeRound connector M12 x 1, 5-pinOutput signal $2 \times PNP/NPN/push-pull$ transistor outputs switchable and $1 \times analog$ output $4 \text{ mA} \dots 20 \text{ mA} / 0 \times \dots 10 \text{ V}$ automatically switchable depending on output load or output voltage depending on the loadOutput load $4 \text{ mA} \dots 20 \text{ mA} < 500 \text{ Ohm at Uv} > 15 \text{ V}, 4 \text{ mA} \dots 20 \text{ mA} < 350 \text{ Ohm at Uv} > 12 \text{ V}, 0 \text{ V} \dots 10 \text{ V} > 750 \text{ Ohm at Uv} 14 \ge \text{ V}$ HysteresisMin. 3 mm, min. 2 °C, free adjustableOutput current $< 100 \text{ mA}$ Inductive load $< 1 \text{ H}$ Capacitive load $100 \text{ nF}$ Enclosure rating $1P67$ Temperature drift $< 0.1 \text{ mm/K}$ Lower signal level $3.8 \text{ mA} \dots 4 \text{ mA}$ Upper signal level $20 \text{ mA} \dots 20.5 \text{ mA}$   | Initialization time         | ≤ 4 s   |
| Output signal $2 \times PNP/NPN/push-pull$ transistor outputs switchable and $1 \times analog$ output $4 \text{ mA} \dots 20 \text{ mA} / 0 \text{ V} \dots 10 \text{ V}$ automatically switchable depending on output load or output voltage depending on the loadOutput load $4 \text{ mA} \dots 20 \text{ mA} < 500 \text{ Ohm at Uv} > 15 \text{ V}, 4 \text{ mA} \dots 20 \text{ mA} < 350 \text{ Ohm at Uv} > 12 \text{ V}, 0 \text{ V} \dots 10 \text{ V} > 750 \text{ Ohm at Uv} 14 \ge \text{V}$ HysteresisMin. 3 mm, min. 2 °C, free adjustableOutput current $< 100 \text{ mA}$ Inductive load $< 1 \text{ H}$ Capacitive load $100 \text{ nF}$ Enclosure ratingIP67Temperature drift $< 0.1 \text{ mm/K}$ Lower signal level $3.8 \text{ mA} \dots 4 \text{ mA}$ Upper signal level $20 \text{ mA} \dots 20.5 \text{ mA}$  | Protection class            | III   |
| O V 10 V automatically switchable depending on output load or output voltage depending on the load  4 mA 20 mA < 500 Ohm at Uv > 15 V, 4 mA 20 mA < 350 Ohm at Uv > 12 V, 0 V 10 V > 750 Ohm at Uv 14 ≥ V  Hysteresis  Min. 3 mm, min. 2 °C, free adjustable  Output current  Inductive load  Capacitive load  100 nF  Enclosure rating  IP67  Temperature drift  20 mA 4 mA  Upper signal level  20 mA 20.5 mA  | Connection type             | Round connector M12 x 1, 5-pin  |
| 750 Ohm at Uv 14 ≥ V  Hysteresis Min. 3 mm, min. 2 °C, free adjustable  Output current < 100 mA  Inductive load < 1 H  Capacitive load 100 nF  Enclosure rating IP67  Temperature drift < 0.1 mm/K  Lower signal level 3.8 mA 4 mA  Upper signal level 20 mA 20.5 mA   | Output signal               | 0 V $\dots$ 10 V automatically switchable depending on output load or output voltage depending on |
| Output current < 100 mA  Inductive load < 1 H  Capacitive load 100 nF  Enclosure rating IP67  Temperature drift < 0.1 mm/K  Lower signal level 3.8 mA 4 mA  Upper signal level 20 mA 20.5 mA   | Output load                 |   |
| Inductive load <1 H  Capacitive load 100 nF  Enclosure rating IP67  Temperature drift <0.1 mm/K  Lower signal level 3.8 mA 4 mA  Upper signal level 20 mA 20.5 mA  | Hysteresis                  | Min. 3 mm, min. 2 °C, free adjustable   |
| Capacitive load  100 nF  Enclosure rating  IP67  Temperature drift  < 0.1 mm/K  Lower signal level  3.8 mA 4 mA  Upper signal level  20 mA 20.5 mA   | Output current              | < 100 mA  |
| Enclosure rating IP67  Temperature drift  < 0.1 mm/K  Lower signal level  3.8 mA 4 mA  Upper signal level  20 mA 20.5 mA   | Inductive load              | <1H   |
| Temperature drift < 0.1 mm/K  Lower signal level 3.8 mA 4 mA  Upper signal level 20 mA 20.5 mA   | Capacitive load             | 100 nF  |
| Lower signal level 3.8 mA 4 mA Upper signal level 20 mA 20.5 mA  | Enclosure rating            | IP67  |
| Upper signal level 20 mA 20.5 mA   | Temperature drift           | < 0.1 mm/K  |
|  | Lower signal level          | 3.8 mA 4 mA   |
| Resolution of analog output 12 bit   | Upper signal level          | 20 mA 20.5 mA   |
|  | Resolution of analog output | 12 bit  |

 $<sup>^{1)}</sup>$  All connections are polarity protected. All outputs are overload and short-circuit protected.

#### Mechanics

| Wetted parts       | Outer tube: polypropylene (PP-H)<br>G ¾" and ¾" NPT: PPSU<br>Easy-clamp bracket: PP |
|--------------------|---|
| Process connection | 3/4" NPT  |
| Housing material   | PBT / PC  |
| Max. probe load    | ≤ 4 Nm  |
| Probe diameter     | 16 mm   |

## Ambient data


| Ambient operating temperature | -20 °C +60 °C |
|-------------------------------|---------------|
| Ambient temperature, storage  | -40 °C +80 °C |

# Classifications

| ECLASS 5.0   | 27200503 |
|--------------|----------|
| ECLASS 5.1.4 | 27200503 |
| ECLASS 6.0   | 27200503 |
| ECLASS 6.2   | 27200503 |
| ECLASS 7.0   | 27200503 |
| ECLASS 8.0   | 27200503 |
| ECLASS 8.1   | 27200503 |
| ECLASS 9.0   | 27200503 |
| ECLASS 10.0  | 27200503 |
| ECLASS 11.0  | 27200503 |


| ECLASS 12.0    | 27200503 |
|----------------|----------|
| ETIM 5.0       | EC001447 |
| ETIM 6.0       | EC001447 |
| ETIM 7.0       | EC001447 |
| ETIM 8.0       | EC001447 |
| UNSPSC 16.0901 | 41113710 |

## Type code

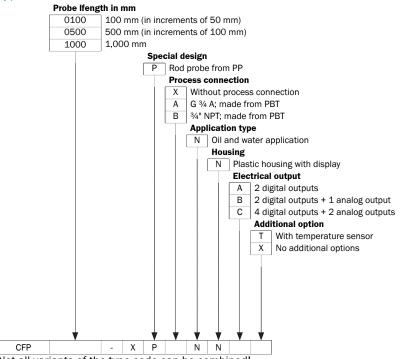


Not all variants of the type code can be combined!

Dimensional drawing (Dimensions in mm (inch))

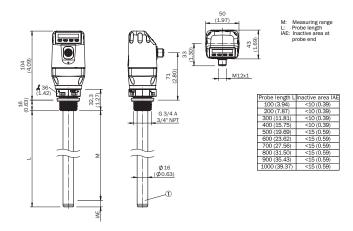

# Connection type

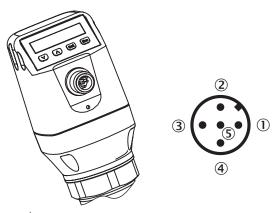

- L<sup>+</sup>: Supply voltage
   Q<sub>A</sub>: Analog current-/voltage output
- M: Ground, reference ground for current-/voltage output
   C/Q1: Switching output 2, PNP/NPN/DRV (Push-Pull) / IO-Link
   Q<sub>2</sub>: Switching output 2, PNP/NPN/DRV (Push-Pull)

#### Recommended accessories

Other models and accessories → www.sick.com/CFP\_Cubic

|              | Brief description  | Туре                              | Part no. |  |
|--------------|--|-----------------------------------|----------|--|
| Connection m | Connection modules   |                                   |          |  |
|              | IO-Link V1.1 Class A port, USB2.0 port, optional external power supply $24V/1A$  | IOLA2US-01101<br>(SiLink2 Master) | 1061790  |  |
| ***          | <ul> <li>Connection type head A: Female connector, M12, 5-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 2 m, 5-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals, Uncontaminated zones</li> </ul>  | YG2A15-<br>020VB5XLEAX            | 2096215  |  |
| 5            | <ul> <li>Connection type head A: Female connector, M12, 5-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 5-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals, Uncontaminated zones</li> </ul>  | YG2A15-<br>050VB5XLEAX            | 2096216  |  |
| 5            | <ul> <li>Connection type head A: Female connector, M12, 5-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 10 m, 5-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals, Uncontaminated zones</li> </ul>   | YG2A15-<br>100VB5XLEAX            | 2096217  |  |
|              | <ul> <li>Connection type head A: Female connector, M12, 5-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 2 m, 5-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul> | YF2A15-<br>020UB5XLEAX            | 2095617  |  |

|              | Brief description   | Туре                   | Part no. |
|--------------|---|------------------------|----------|
|              | <ul> <li>Connection type head A: Female connector, M12, 5-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 5-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>  | YF2A15-<br>050UB5XLEAX | 2095618  |
|              | <ul> <li>Connection type head A: Female connector, M12, 5-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 10 m, 5-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul> | YF2A15-<br>100UB5XLEAX | 2095619  |
|              | <ul> <li>Connection type head A: Female connector, M12, 5-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 2 m, 5-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>    | YG2A15-<br>020UB5XLEAX | 2095772  |
|              | <ul> <li>Connection type head A: Female connector, M12, 5-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 5-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>    | YG2A15-<br>050UB5XLEAX | 2095773  |
|              | <ul> <li>Connection type head A: Female connector, M12, 5-pin, angled, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 10 m, 5-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li> </ul>   | YG2A15-<br>100UB5XLEAX | 2095774  |
|              | <ul> <li>Connection type head A: Female connector, M12, 5-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 2 m, 5-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals, Uncontaminated zones</li> </ul>   | YF2A15-<br>020VB5XLEAX | 2096239  |
|              | <ul> <li>Connection type head A: Female connector, M12, 5-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 5-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals, Uncontaminated zones</li> </ul>   | YF2A15-<br>050VB5XLEAX | 2096240  |
|              | <ul> <li>Connection type head A: Female connector, M12, 5-pin, straight, A-coded</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 10 m, 5-wire, PVC</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with chemicals, Uncontaminated zones</li> </ul>  | YF2A15-<br>100VB5XLEAX | 2096241  |
| Sensor Visua | lization  |                        |          |
|              | <ul> <li>Product category: LED signal lamp</li> <li>Further functions: IO-Link signal lamp, Parameterization via IO-Link, Simple configuration directly via the SOPAS ET user interface, the engineering tool from SICK</li> </ul>  | SLT060-0B010J700       | 6075938  |

#### Recommended services

Additional services → www.sick.com/CFP\_Cubic

|  | Туре                   | Part no.   |
|--|------------------------|------------|
| Function Block Factory   |                        |            |
| <ul> <li>Description: The Function Block Factory is an engineering tool for creating device and environment-specific function blocks that enable IO-Link sensors to be integrated into programmable logic controllers. The Function Block Factory supports common programmable logic controllers (PLCs) of various manufacturers such as Siemens, Beckhoff, Rockwell Automation B&amp;R and more. More information on the FBF can be found <a href="https://fbf.cloud.sick.com" target="_blank">here </a>.</li> <li>Provision: Customers can obtain access to the Function Block Factory and the license via <a href="https://fbf.cloud.sick.com" target="_blank">https://fbf.cloud.sick.com</a>.</li> </ul> | Function Block Factory | On request |

# SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

